




Weigh Pack Electrical

SF/SG SERIES PRICE COMPUTING SCALES



SG-15KA
Table top type

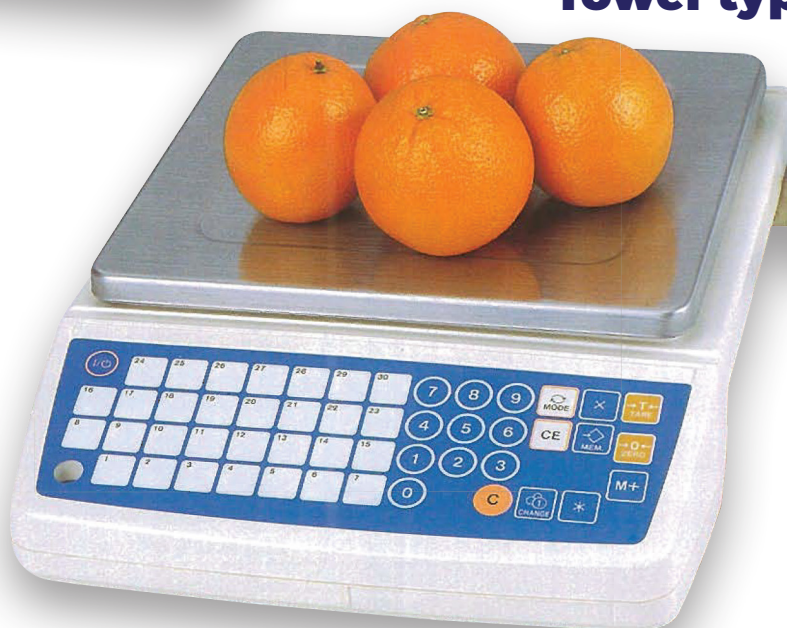

SF-30KA
Tower type




Features

- Shock & overload protection for a long operating life
- Splashproof keyboard & display
- Select from 12 models to meet most requirements
- Battery operation for use in areas without power
- Efficient & intuitive operation speeds checkout times
- Stores weight/prices for up to 30 items (SF model)
- Stores weight/prices for up to 12 items (SG model)
- Large wide angle display makes reading easy under all conditions
- Push button and keyboard tare entry
- Large stainless steel weighing pan resists damage and corrosion
- Optional RS-232C interface for printer and PC connection
- Select from AC power, replaceable batteries or rechargeable battery



SF: Tower type

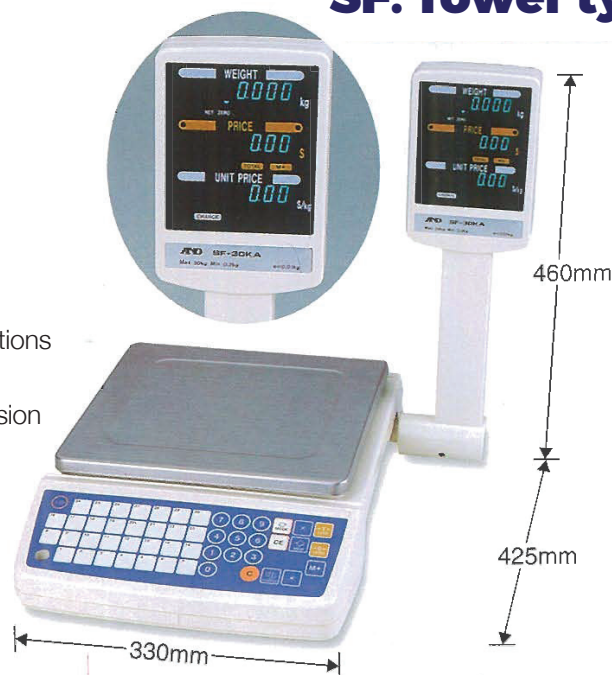

SG: Table top type

Specifications

Model	SF-6KA/6KB/6KC	SF-15KA/15KB/15KC	SF-30KA/30KB/30KC	SG-6KA	SG-15KA	SG-30KA
Capacity/Resolution	3kg x 1g/6kg x 2g	6kg x 2g/15kg x 5g	15kg x 5g/30kg x 10gx 10g	3kg x 1g/ 6kg x 2g	6kg x 2g/ 15kg x 5g	15kg x 5g/ 30kg x 10g
Non-linearity	±2g	±5g	±10g	±2g	±5g	±10g
Repeatability/Std. Dev	2g	5g	10g	2g	5g	10g
Display	Vacuum Fluorescent Display - SF-A/C; Liquid Crystal Display - SF-B/SG-A					
Display Indications	Weight - 5 digits Price - 7 digits Unit Price - 6 digits					
Pan Size	300mm (W) x 280mm (D)					
Weight (Approximately)	5.5kg			4.5kg		
Power	SF-A: AC power only	SF-B/SG-A: AC adaptor & dry battery (6 x “D” size)		SF-C: AC adaptor & NiCd rechargeable battery (Option)		
Battery Life (Approximately)	300 hours with manganese type cells 500 hours with alkaline type cells					
Operating Temperature	-10°C ~ 40°C					
Dimensions	465mm (W) x 425mm (D) x 460mm (H)			330mm (W) x 425mm (D) x 108mm (H)		
Standard Accessories	Manual; AC adaptor (Excludes SF-A Series)					

Specifications are subject to change for improvement without notice

Option

SFG-03 Serial Interface (RS-232C)

SF-09 Rechargeable Battery Pack

Email: Sales@weighpackelectrical.com.au
Service@weighpackelectrical.com.au

Phone: 0488 199 318